


# Integrated WizarSwitch

## IPC-6+

With Built-in USB Repeater

**NEW!**

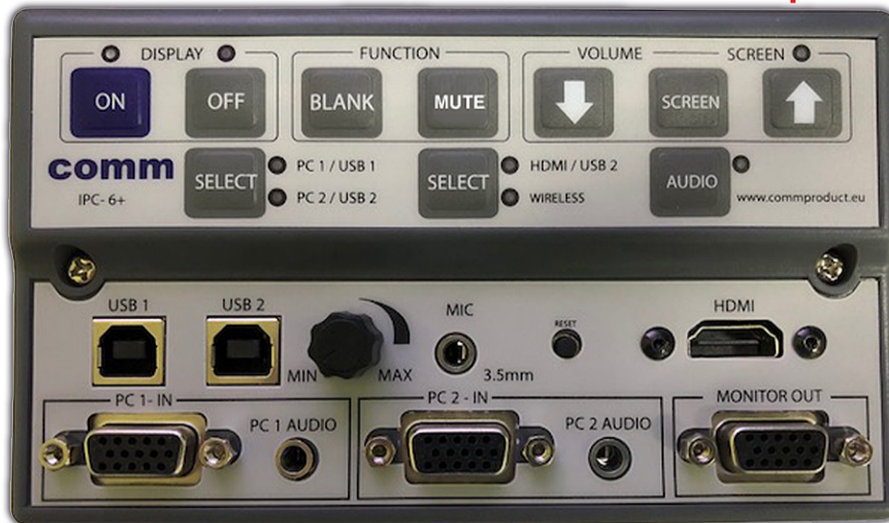

**comm Integrated WizarSwitch (IPC Series)** - Designed to control your Audiovisual Equipment in the most simplified ways via RS-232 or IR commands; reasonably priced and works with most projectors and displays.

One Touch Selection with LED Back-Lit Indications on the selectors' buttons, you can easily control your displays with its various selector buttons (e.g. select the different input source, volume and/or screen controls etc)

Built-In Signal Amplifiers of 250MHz / 350MHz bandwidths to minimise signal-loss worries. Widely used in Classrooms, Auditoriums, Lecture Theatres, Conference Rooms etc.

### FEATURES

**Display Controller** for your Projector, Display (Power ON/OFF, input source selections, volume control) via RS232 or IR Commands

**One Touch Selection** with LED Back-Lit Indications

**INPUTS : 2 VGA with USB, 1 HDMI with USB**

**OUTPUTS: 2 VGA, 1 USB, 1 HDMI**

**Built-In Signal Amplifier** of 250MHz

**Digital Volume Control** for sound level adjustments

**Volume Control Knob** for MIC Inputs sound adjustments

#### **NEW Features!**

- **STANDBY mode - MIC Volume Control usable**

- **PC1 with Audio: PC Monitor is usable even when Projector is OFF**

- **2 USB Connections with Built-in USB Repeater**

#### **SELECTOR SWITCH**

(with LED Back-Lit Indications)

- Display ON / OFF

- Blank (Toggle Button)

- Mute (Toggle Button)

- Screen / Audio Volume (UP / DOWN)

- VGA with USB IN Selector (Switch between PC1 or PC2)

- HDMI / WIRELESS Selector

- Volume Control Knob (for MIC Inputs)

- Reset for HDMI

### SPECIFICATIONS

#### **A) Input**

PC1 / PC2 Signal - VGA (D-Sub 15-Pin Female)

PC1 / PC2 Audio - 3.5mm Mini Jack

HDMI - HDMI with Audio Embedded

Microphone IN - 3.5mm Mini Jack

USB 1 / USB 2 IN - USB Female Type B Connector

RJ45

#### **B) Output**

PC Signal - VGA Bandwidth of 250MHz

PC Signal - Monitor OUT, VGA Bandwidth 250MHz

HDMI - HDMI

Audio Signal

Microphone OUT

USB OUT

RJ45

#### **C) Communication Control**

Serial Control Port - RS232

Baud Rate - 9600, 19200, 38400, 115200

Data / Stop Bits - 8 Bits / 1 Bits

No parity

#### **D) Power**

DC 12V Power Adapter

All products information and specifications are subject to changes without prior notice.