

Auto-Power Active Speakers

CWS-216A

NEW!



comm Active Speakers CWS-216A,
The 2-way Active Speaker System with
built-in amplifier and auto-power
specially designed for use in classrooms
and conference rooms.

SPECIFICATIONS

A) Technical Information

- Amplifier Output Power 30Wx2
- Speaker System Power **60W (RMS)**
- Speaker Unit Tweeter- 1" Mylar, Woofer- 5 1/4"
- Impedance 4 ohm
- Frequency Response 60Hz ~ 20KHz
- Amplifier Power Volt 100~240V
- Amplifier Input Level 300mV
- Amplifier Distortion ≥5%@30W
- Sensitivity 102dB±3dB@30W-1m

- Unit Dimension (LxBxH) 183 x 172 x 240 mm
- Net Weight (Active Speaker) 2.6 kg / 5.73 lbs
- Net Weight (Passive Speaker) 2.1 kg / 4.63 lbs


B) Controls

- Volume, Treble, Bass
- Power ON/OFF/AUTO

C) Interfaces / Ports

- Input Port Left/Right Audio x 1 (RCA)
Mini Jack x 2 (3.5mm)
- Output Port Loop Output x 1 (3.5mm)
Sub Out x 1 (3.5mm)
Speaker Out Connector (to Passive Speaker)

Controls & Interfaces

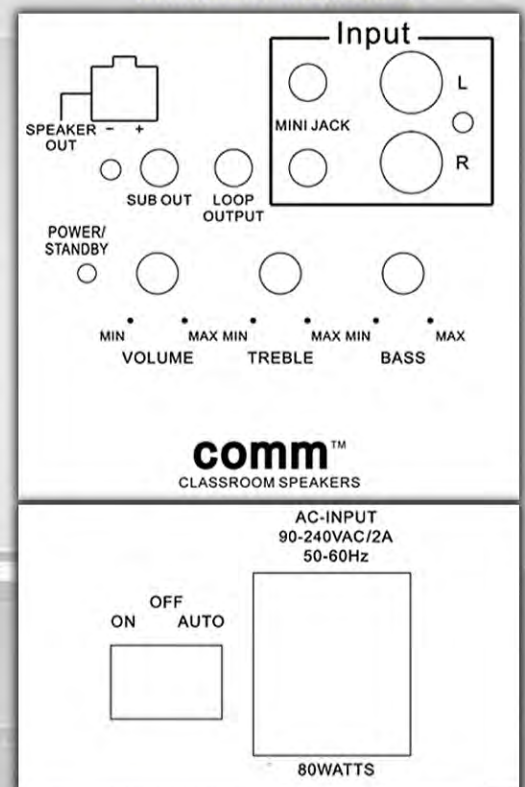

Accessories Included

- | | |
|---|--------|
| 1) Power Cable (10 meter) | x 1 pc |
| 2) Audio RCA Cable (10 meters) | x 1 pc |
| 3) Speaker to Speaker Cable (10 meters) | x 1 pc |
| 4) U-Bracket (for Mounting) | x 2 pc |
| 5) Mounting Knob | x 4 pc |

All products information and specifications are subject to changes without prior notice.