


Portable P.A. Amplifier

CWR-1020

- ✓ 20 watts of power
- ✓ Able to connect multiple units for a larger audience group, able to amplified audio up to 150 audience (estimation)
- ✓ 1 Wired MIC input jack and 1 Wireless microphone
- ✓ Come with USB media player
- ✓ ON/OFF Power switch to save power
- ✓ Built-in Lithium Rechargeable Battery
- ✓ Portable and lightweight at 2.2kg

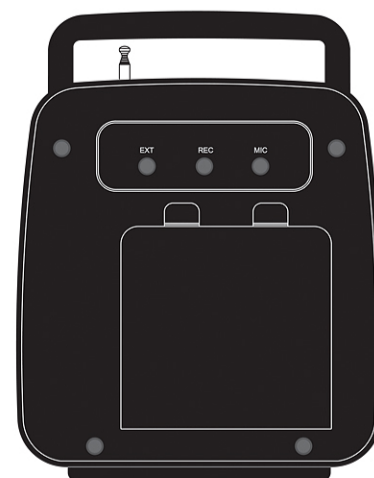

SPECIFICATIONS

Preliminary Datasheet

A) Wireless Receiver

● Frequency Range	200 to 270Mhz
● Frequency Stability	± 0.0005%
● Sensitivity	-96dB
● Spurious Emission	≤ 45dB
● Image and Spurious Rejection	≥ 40dB
● SNR	75dB
● Distortion	< 1%
● Power Source	8V
● Current Consumption	120mA
● Modulation Mode	FM
● Channel Number	1 CH

B) PA System

● Output Power	RMS 15W@4ohm, MAX 20W
● Speaker	Built-In 5" Full Range Speaker
● Distortion	10%
● AF Frequency Response	100Hz ~ 15KHz (± 3dB)
● Input Signal	1 X Wired MIC / 1 X Wireless MIC, 1 EXT
● Output Signal	1 X REC
● Recharging Time	5 ~ 6 Hours
● Operating Time	2 ~ 3 Hours
● Dimensions	185 (L) x 90 (W) x 133 (H) mm
● Weight	2.2 kg (includes battery)

All products information and specifications are subject to changes without prior notice.